

Vino Series Wine Rack Post

Install guide for standard Vino Series Post (VS/VP/VR-FCP skus) configurations.



3D INTERACTIVE INSTRUCTIONS

USE BILT TO ASSEMBLE WITH CONFIDENCE

For fast 3D step-by-step instructions,
download the free BILT app!



Available on most iOS and Android Devices



Included:

- (1) 10' Post [includes (1) Hollow Post Section and (1) c-Channel Post Section]
- (2) 6" Mounting Bases
- (96) Mounting Plate Screws
- Drill Bit

Additional Components:

(sold separately)

- Vino Series Post Mounting Plates with Self-Drilling Screws
- Vino Pins or Vino Rails
- [optional] (1) 2' Post Extension or 5' Post Extension

Required Tools:

- Drill
- Phillips head drill bit
- Phillips head screwdriver
- Level
- Pencil or Marker
- Tape measure
- Metal cutting saw
- Metal file
- Square
- Rubber Mallet (optional)

Important Note:

These installation instructions will assist you with installing the VintageView Vino Series Post System (10', 12', or 15' configurations) in standard floor-to-ceiling applications. The Post System is designed for ceiling heights of up to 122" (310cm), 144" (366cm), 180" (458cm), respectively. **If using 5' Post; or Angled, Hidden, Floor-to-Wall, and other non-standard Mounting Bases, refer to specific instructions for complete installation details.**

Fasteners:

Fasteners for securing Mounting Plates to the Vino Series Posts are provided (self-drilling screws). Each mounting Plate is pre-drilled for installing Post. When installing finished Vino Series Post to the floor or ceiling, please use the following recommendations for fasteners:

1. IDENTIFY HARDWARE

Using the facing chart, identify the proper floor/ceiling hardware (not included) that will be needed for your specific project.

For drywall surfaces, VintageView recommend installing to joists or wood backing when available.

Guidelines for Floor/Ceiling Hardware

Wood/Stud: #8 x 1-1/4" course thread screws (or longer)
Concrete, Brick, or Stucco: 3/16" x 1-1/4" masonry screw
or #8 x 1- 1/4" screw with appropriate size expanding anchor
Drywall: Expanding hollow wall anchors with at least #8 screw size





2. MEASURE INSTALLATION HEIGHT

Measure the ceiling height of the location of the first Post. Subtract 1/2" (1.5cm) from the measurement.

**** OPTIONAL 12' or 15' ADJUSTMENT ****

3. INSERT EXTENSION

If using a Vino Series Extension Piece (SKUs: VS-FCP-2, VS-FCP-12, or VS-FCP-15), complete this step.

Slide the Hollow Post Section onto the C-Channel of the 2' or 5' Extension. It may require a Rubber Mallet to connect fully.

4. MARK THE POST

Before installing the Mounting Plates, lay one Post Section, overlapping with one c-Channel Post Section (Figure A). Position the Post so that the measurement from top to bottom of the base plates equals your measurement from Step 2.

Use a pencil or marker to mark any overlap on the Post Section (Figure A). Do not mark/cut from the c-Channel Post Section.

Note: The Mounting Base inserted into the top Post Section can telescope out 2" (51cm).

5. CUT THE POST

Using a Metal Cutting Saw, squarely cut the Post Section at the mark (Figure B). Use a Metal File to smooth rough edges. Avoid abrasive saws; they may damage the finish. Slide the Post Section onto the c-Channel of the lower Post (Figure C). It may require a Rubber Mallet to connect.

***** IMPORTANT NOTE PREDRILLED POSTS *****

If using a pre-drilled Post, do not cut from the connection side of the Hollow Post (noted with "joining end" sticker). Doing so will cause alignment issues.

7. INSERT MOUNTING BASES

Insert (1) Mounting Base into the open end of the c-Channel Post Section (bottom Post). Mounting Base must be fully inserted into the Post. Secure the Mounting Base into the Post only with (2) self-drilling screws through the pre-drilled holes (Figure D). Insert Mounting Base into the Post Section. Do not secure with screws yet to allow for height flexibility.

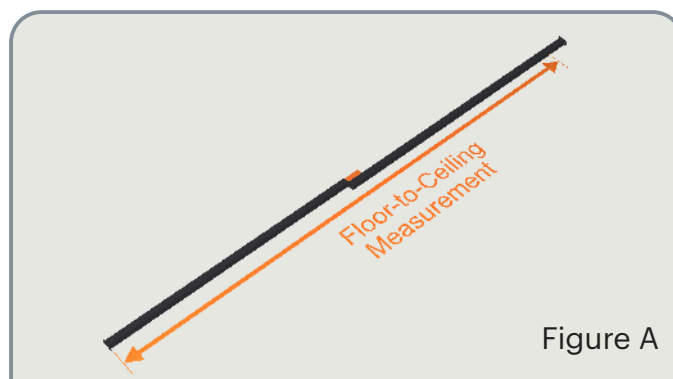


Figure A

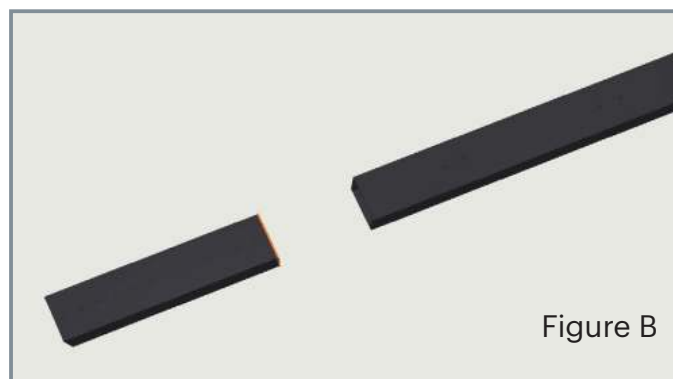


Figure B



Figure C

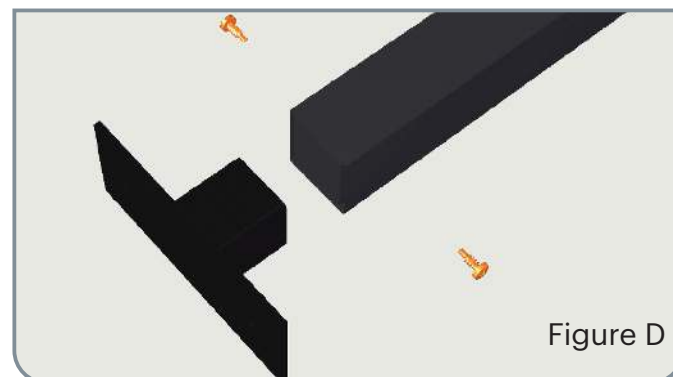


Figure D





8. MARK MOUNTING HOLES

Place the Post in the desired location. Ensure it's plumb with a level and mark mounting holes on both the ceiling and the floor. Set Post aside and pre-drill required pilot holes based on hardware selection.

9. MARK MOUNTING PLATE HOLES

Lay the first Mounting Plate in the desired location on the connected Post. Mark two (2) mounting hole locations. Mark the holes for the next Plate ensuring a minimum of 3-3/4" (9.5cm) vertical clearance from one Plate to the next (Figure E). Use a Level and a Square to ensure Plates are Level. Set the plate to the side.

NOTE: Plates can be installed to one, two, three, or four sides of the Post. If consecutive Plates are assembled on adjacent sides, a minimum of 3-3/4" (9.5cm) vertical clearance is required (Figure F).

10. PRE-DRILL MOUNTING HOLES

Using the provided Drill Bit, pre-drill all marked mounting hole locations.

11. ASSEMBLE AND THE PLATES

For Vino Pins

Mounting Plates are sold in two unique widths: one for standard 750ml or Champagne bottles and one for magnum 1.5L bottles.

(Optional) Assemble the Vino Pins and Vino Pins Extensions (Figure G) to reach desired bottle depth (up to 3 bottles deep for 750ml bottles and up to 2 bottles deep, with spacer, for Magnum or Champagne bottles).

Fasten the Vino Pins to the Mounting Plates using provided M6 Screws (Figure H). Ensure the higher mounting hole in the Mounting Plate points in the direction you want the bottle neck to face.

Fasten the Vino Pins Neck (slimmer bottle impression) piece to the higher of the two holes.

For Vino Rails

Mounting Plates are sold in standard 750ml or Champagne bottles and magnum 1.5L bottles configurations, each with choice of single, double, or triple bottle width. Thread all Vino Rails to the Mounting Plates using the provided M6 Screws (Figure I).

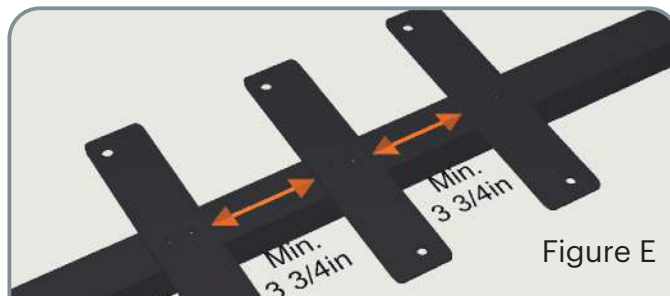


Figure E

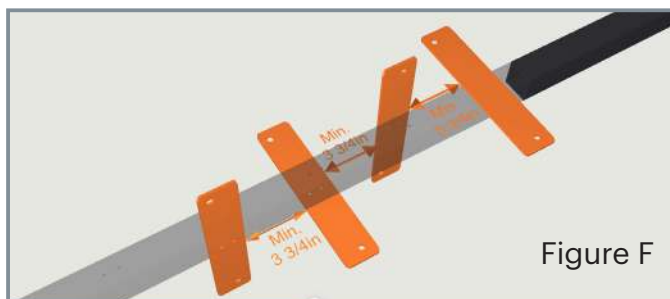


Figure F

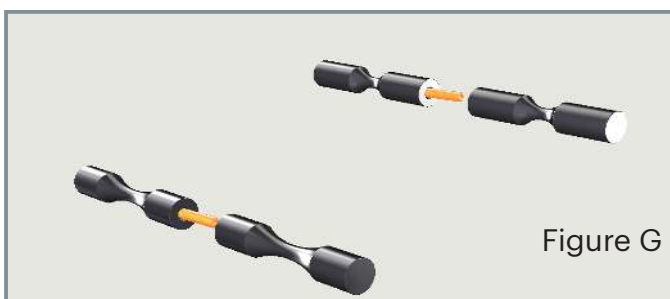


Figure G

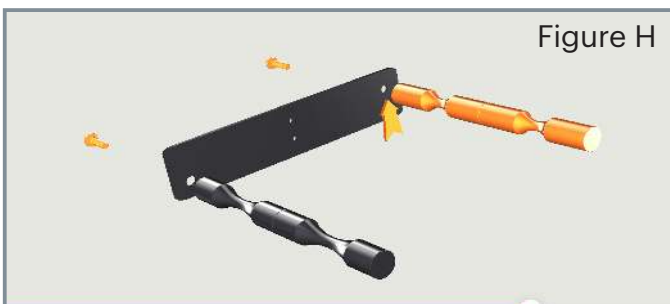


Figure H



Figure I



Instructions: Vino Series Post (for Pins or Rails)



NOTE: If installing Vino Rails Magnum racks, do not insert supplied Bridge until installation is finished.

12. INSTALL THE PLATES

Attach one (1) assembled Mounting Plate to the Post using two (2) Self-Drilling Screws into the pre-drilled holes (Figure J). Repeat the previous step to attach the remaining Mounting Plate assemblies (Figure K).

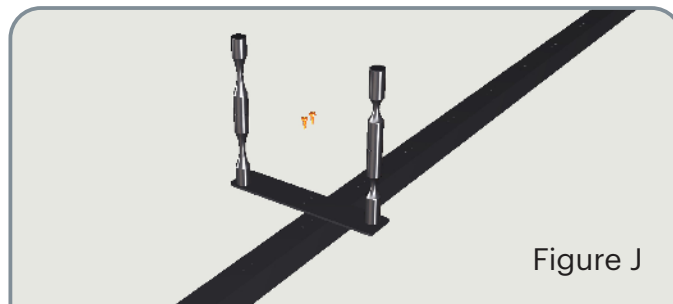


Figure J

13. INSTALL THE SYSTEM

Stand the Post Assembly in the desired location and ensure it is plumb both front and back and side-to-side with a level.

Secure the Post to the ceiling (Figure L) using two (2) of the appropriate fasteners (not provided). Double check the Post is plumb and secure the Post to the floor using two (2) appropriate fasteners (not provided).

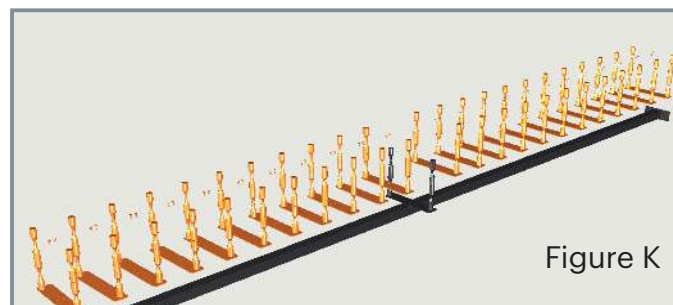


Figure K

You can adjust the Mounting Base up to 2" (5cm) to meet the ceiling. Once the top Mounting Base is fully installed to ceiling, secure to Post using (2) self-drilling screws through pre-drilled holes (Figure L).



Figure L

If any of the Mounting Plates appear unlevel, loosen one (1) Screw slightly and reposition using a Rubber Mallet and Level (Figure M). Re-tighten.

SCAN FOR BILT 3D INSTRUCTIONS



POWERED BY BILT INTELLIGENT INSTRUCTIONS®

14. ADD WINE

Only the good stuff.



Figure M

Problems?

Try BILT 3D intelligent instructions, visit www.vintageview.com, or call 303-504-9463.

Maintenance and Care:

The Vino Series Post is covered by a lifetime warranty against factory defects.

Racking should be regularly checked for tightness. Should any piece be found to be loose, tighten by hand (Racks) or screwdriver (Plates) until secure.

The Vino Series Post System may be cleaned with a dry cloth or compressed air. Use rubbing alcohol for stubborn stains or marks. Avoid household cleaners, chemicals, abrasive pads or steel wool as they will damage the finish.

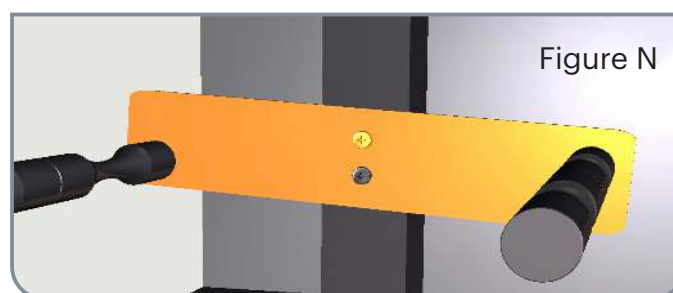


Figure N



VINTAGEVIEW®
MOVING WINE STORAGE FORWARD