

WineZone 3800 BTUH Ductless Split Specifications

Condenser:

<u>Voltage</u>	<u>HP</u>	<u>Ampacity</u>	<u>Max. Fuse</u>	<u>Min. Wire Size</u>	<u>RLA/LRA</u>	<u>dB</u>
230/208-60-1	1/2	6.1	15	14-2 w/Gr	4.3/31.0	56

- Water-cooled condensers available
- 1/4" x 1/2" line set. 80 equivalent feet maximum
- Unit is not precharged and must be evacuated
- Dimensions:

Indoor Unit: 25" x 20" x 16 3/4"

Outdoor Unit: 27" x 20" x 20"

Wall Mounted Evaporator:

<u>Voltage</u>	<u>Motor Output</u>	<u>Max. Fuse</u>	<u>Min. Wire Size</u>	<u>Filter</u>	<u>dB</u>
230/208-60-1	12 Watts	15	14-2 w/Gr	Washable	45


- Receives load voltage from condenser
- Line voltage run to condenser
- Drain line is 7/16" I.D. and 5/8" O.D.
- Dimensions: 31 3/4" W x 11 7/16" H x 7 1/8" D

Thermostat:

- Honeywell T8400
- 18-gauge 2-wire to the condenser

Approximate Shipping Weight: 165-205 lbs.

Crate Size: 31" x 37" x 41"T

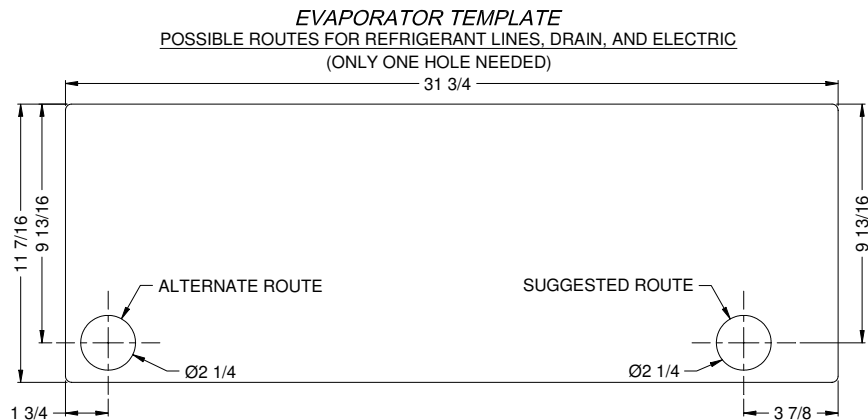

The holes shown are the best locations to route the refrigerant lines, condensate drain, and electric. For installations where the line set will be accessible on the backside of the wall, use the suggested route. When that is not possible, and the line set will be run inside the wall before the drywall is installed, use the alternate route. This will leave the flare connections exposed so they can be connected after the walls are finished.